

Mobile Controlled Bluetooth Car

Autor: Macadon Andrei-Cristian

Introducere

- Proiectul este reprezentat de o masinuta care poate fi controlata dintr-o aplicatie Arduino. Acest lucru este posibil printr-un modul bluetooth HC-05 conectat la placuta arduino uno. De asemenea, atunci cand masinuta da cu spatele un LED verde va palpai. Exista comanda 'A' care va pune masinuta pe avarii. Avariile pot fi oprite dand, din nou, comanda 'A' sau dand comanda 'S'(ce opreste si motoarele). Aceasta se afla pe un sasiu de robot.
- Masinuta poate avea mai multe scopuri:
 1. Poate fi folosita pe post de vehicul transport/poate cara anumite chestii: Ex: Iti poti aduce o ciocolata din bucatarie in sufragerie doar cu ajutorul telefonului
 2. Poti pune un servetel sub ea, aceasta curatand zonele prin care se va plimba
 3. De asemenea, aceasta poate fi folosita si pe post de simpla jucarie.

Hardware Design

Lista componente

1. Arduino Uno
2. Placa de control motoare L298n
3. 4 motoare
4. Baterie
5. Modul Bluetooth HC-05
6. Sasiu robot
7. Cabluri

Schema Bloc



Software Design

- Implementarea codului este destul de simpla. Prin intermediul calculatorului ma conectez la modulul bluetooth, iar printr-un terminal trimit comenzi precum 'F'(masina merge in fata), 'B'(masina da cu spatele), 'L'(masina face stanga), 'R'(masina face dreapta), 'S'(masina se opreste, avariile se opresc), 'A'(se pornesc sau se sting avariile).
- Pentru a folosi modulul bluetooth am inclus libraria SoftwareSerial.h.
- In setup() setez pinii de output. In loop() verific mereu requestul primit de la terminal si actionez corespunzator(misc masina sau activez avariile). Folosesc doua flag-uri: "avarii" si "backwardsLights" pentru a gestiona aprinderea si inchiderea LED-urilor.

Codul masinii

```
<code>#include <SoftwareSerial.h> SoftwareSerial hc05(0, 1);
```

```
int m1pin1 = 8; int m1pin2 = 9; int m2pin1 = 10; int m2pin2 = 11; int avarii = 0; int backwardsLights = 0; char request;
```

```
void setup() {
```

```
Serial.begin(9600);
```

```
hc05.begin(9600);  
// put your setup code here, to run once:  
pinMode(m1pin1, OUTPUT);  
pinMode(m1pin2, OUTPUT);  
pinMode(m2pin1, OUTPUT);  
pinMode(m2pin2, OUTPUT);
```

```
pinMode(4, OUTPUT);  
pinMode(5, OUTPUT);
```

```
}
```

```
void loop() {
```

```
  request = ' '  
  if(hc05.available() > 0){  
    request = hc05.read();  
    Serial.write(Serial.read());  
  }
```

```
  if (request == 'F') {
```

```
    //Make the motors run forward:
```

```
    digitalWrite(m1pin1, HIGH);  
    digitalWrite(m1pin2, LOW);
```

```
    digitalWrite(m2pin1, HIGH);  
    digitalWrite(m2pin2, LOW);
```

```
    backwardsLights = 0;
```

```
    analogWrite(4, 255); //ENA pin  
    analogWrite(5, 255); //ENB pin  
  }
```

```
  if(backwardsLights == 1){  
    digitalWrite(6, HIGH);  
    delay(500);  
    digitalWrite(6, LOW);  
    delay(500);  
  }
```

```
  if (request == 'B') {
```

```
    //Make the motors run backwards
```

```
    digitalWrite(m1pin1, LOW);  
    digitalWrite(m1pin2, HIGH);
```

```
    digitalWrite(m2pin1, LOW);  
    digitalWrite(m2pin2, HIGH);
```

```
    // set the flag for the backwardsLights  
    backwardsLights = 1;
```

```
digitalWrite(6, HIGH);
delay(1000);
digitalWrite(6, LOW);
delay(1000);

analogWrite(4, 255); //ENA pin
analogWrite(5, 255); //ENB pin
}
```

```
if (request == 'L') {
```

```
//Make only the left motors run
digitalWrite(m1pin1, HIGH);
digitalWrite(m1pin2, LOW);

digitalWrite(m2pin1, LOW);
digitalWrite(m2pin2, LOW);
```

```
backwardsLights = 0;
```

```
analogWrite(4, 255); //ENA pin
analogWrite(5, 255); //ENB pin
}
```

```
if (request == 'R') {
```

```
//Make only the right motors run
digitalWrite(m1pin1, LOW);
digitalWrite(m1pin2, LOW);
```

```
digitalWrite(m2pin1, HIGH);
digitalWrite(m2pin2, LOW);
```

```
backwardsLights = 0;
```

```
analogWrite(4, 255); //ENA pin
analogWrite(5, 255); //ENB pin
}
```

```
//check the avarii flag to see if the red LED should be flickering or not
if(avarii == 1){
    digitalWrite(7, HIGH);
    delay(500);
    digitalWrite(7, LOW);
    delay(500);
}
```

```
if (request == 'S') {
```





```
// stop all the motors
digitalWrite(m1pin1, LOW);
digitalWrite(m1pin2, LOW);
```

```
digitalWrite(m2pin1, LOW);
digitalWrite(m2pin2, LOW);
```

```
//stop avarii
digitalWrite(7, LOW);

analogWrite(4, 0); //ENA pin
analogWrite(5, 0); //ENB pin
//set the flags accordingly
avarii = 0;
backwardsLights = 0;
}
if(request == 'A'){
  // turn on avarii
  digitalWrite(7, HIGH);
  delay(1000);
  digitalWrite(7, LOW);
  delay(1000);
  // if avarii were already turned on, turn them off
  if(avarii == 0){
    avarii = 1;
  } else {
    avarii = 0;
  }
}
}
```

Poze

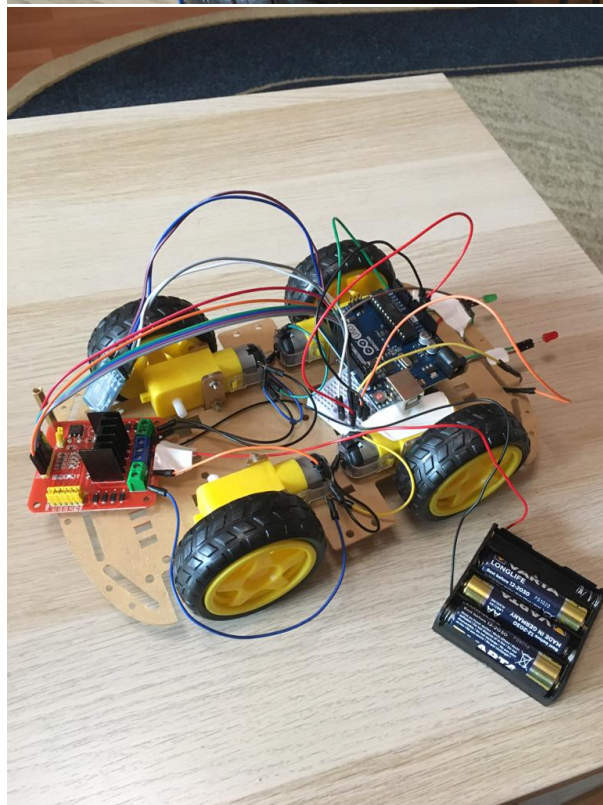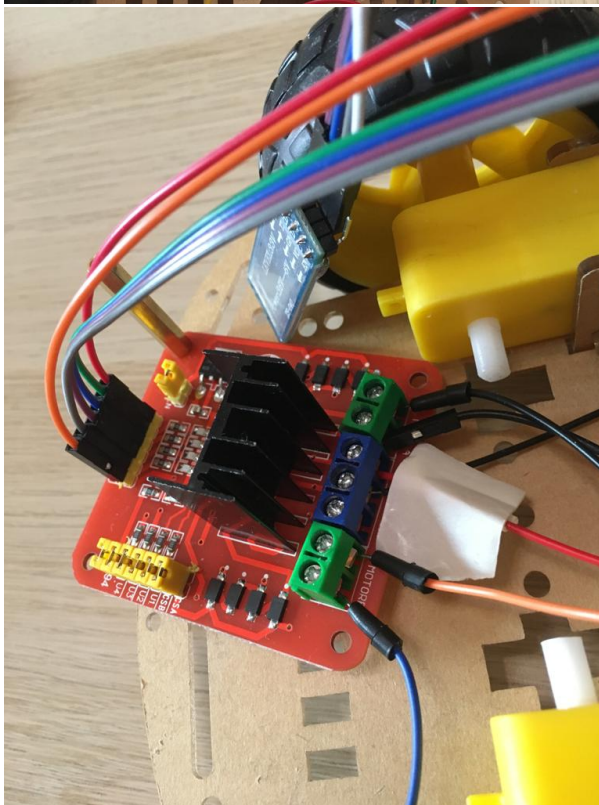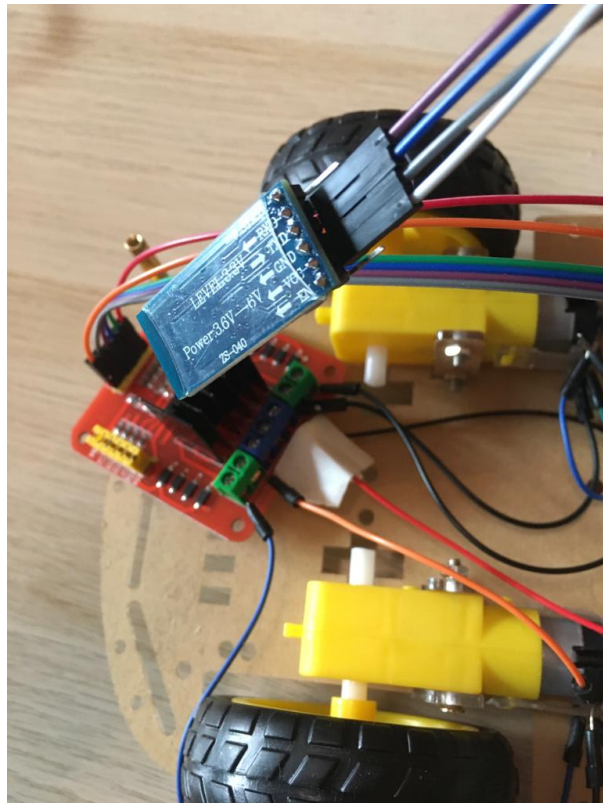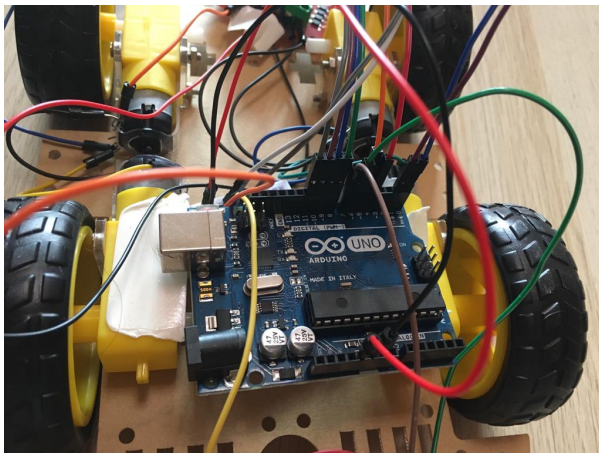

Demo

https://youtu.be/WCbSVXxYX_Y

Bibliografie

<https://www.youtube.com/watch?v=tujih1afqiE>

https://ocw.cs.pub.ro/courses/pm/prj2021/abirlica/mcb_car

https://ocw.cs.pub.ro/courses/pm/prj2021/abirlica/mcb_car?do=export_pdf

From:

<http://ocw.cs.pub.ro/courses/> - **CS Open CourseWare**

Permanent link:

http://ocw.cs.pub.ro/courses/pm/prj2021/abirlica/mcb_car



Last update: **2021/06/04 14:02**